MARIOT®
KITCHEN EQUIPMENT

DATA SHEET



SPZLR0AER00

HIGH - SPEED CONVECTION OVEN
2,4" DIGITAL LCD CONTROL


FUNCTIONAL CHARACTERISTICS	
Display	Digital
Supply	Electric
Timer	-
Number of motors	1
Motor speeds	5 speed + inverter
Max cooking temperature	260°C
Probe	Single point PT1000
Cooking chamber material	AISI304
Opening door	Flap door
Chimney	20mm open
Humidification	-
Air injection	-
Version	Standard
Venteless	-


+9714 2 88 2777 admin@mariotkitchen.com
www.mariotstore.com


VENIX Food Service Equipments


STANDARDS	
Cer tification	CE
TRAYS	
Trays rack	Sheet metal single level
Max tray load	3kg
Pizza paddle	SPZFLA (optional)
Panini paddle	SPZSHO (optional)
Pizza tray	85GRI00327 (optional)
Perforated pizza pan	85GRI00406 (Optional)
Panini grid	85GRI00310 (optional)
Crumbs tray	85VAS00080
Teflon sheet 270 x 270 mm	50GPP00086 (optional)
Teflon sheet 305 x 305 mm	50GPP00088 (optional)
Teflon tray 305 x 305 x 24 mm	50GPP00087 (optional)
DIMENSIONS	
Oven size with handle WxDxH	460 x 655 x 525 mm
Oven size without handle WxDxH	460 x 610 x 525 mm
Chamber size WxDxH	320 x 315 x 215 mm
Unit weight	36kg
PACKAGING	
Packaging	Carton box
Packaging size WxDxH	540 x 700 x 675 mm
Unit weight with packaging	48,4kg
Crate packaging size (optional)	510 x 720 x 670 mm
Unit weight with crate packaging (optional)	61,8kg
ELECTRICAL DATA	
HEATERS 3,1kW 50/60Hz	
Power	3,4kW
Frequency	50/60Hz
Power supply	220-240V ~
Amperage	14,8A
Power cord req.	3G1,5

WATER CONNECTION REQUIREMENTS	
Humidification Water Inlet	-
Washing Water Inlet	-
Water drain	-
Max water hardness	-
Water pressure requirement min-max	-
CONSUMPTION	
Humidification Water with solenoid valve	-
Humidification Water with pump	-
Rinse Water @2barG	-
Short Washing Water @2barG	-
Long Washing Water @2barG	-
Short Washing Detergent *	-
Long Washing Detergent *	-
CONNECTIVITY	
USB	USB 2.0
Bluetooth	-
Wi-Fi	Standard
Cloud	Standard
ACCESSORIES	
Pizza paddle	-
Panini paddle	-
Pizza grid	-
Panini grid	-
Teflon sheet 270 x 270 mm	-
Teflon sheet 305 x 305 mm	-
Teflon tray 305 x 305 x 24 mm	-
Hood	POSPZ*
Control simulator	85KIT00167

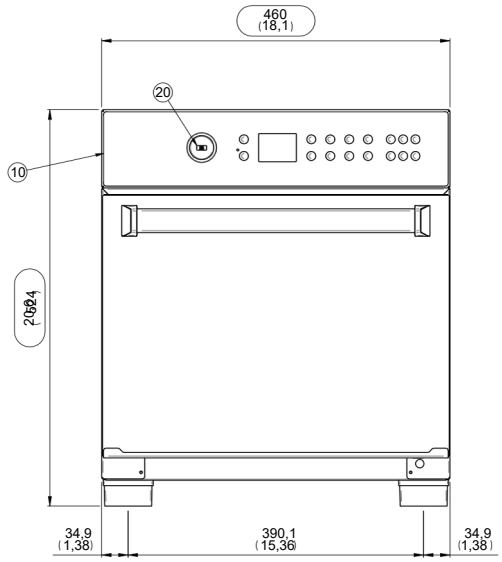

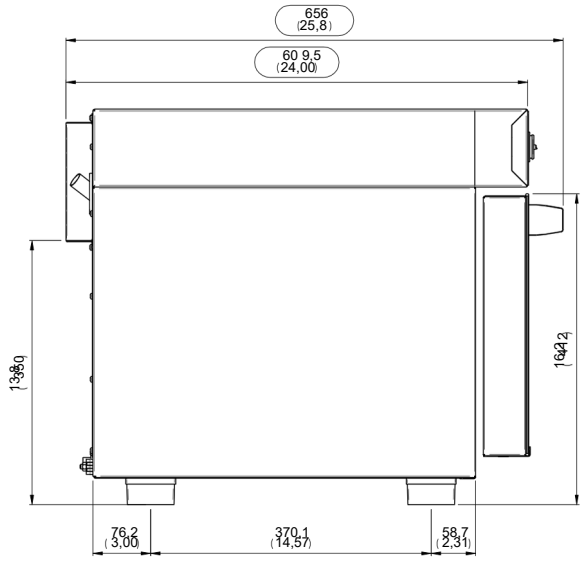

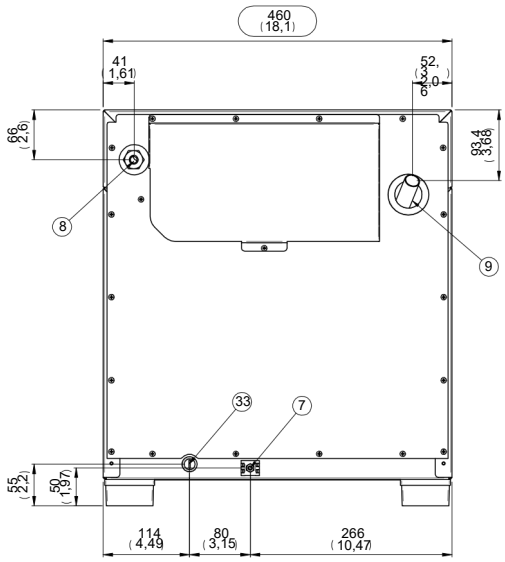

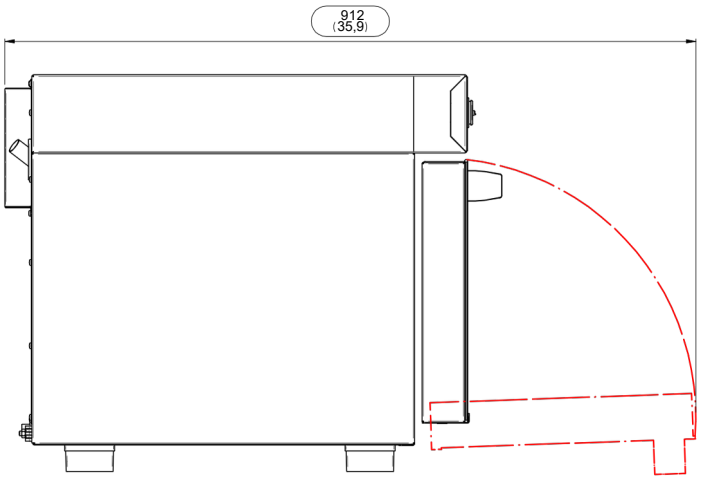

07.	UNIPOTENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
09.	HOT FUMES EXHAUST CHIMNEY (Ø20MM)

10.	DIGITAL CONTROL
20.	USB CONNECTION
33.	SAFETY THERMOSTAT