



CP06DG0

BAKERY OVEN 6 TRAYS 600x400 - GN 1/1
2,4" DIGITAL LCD CONTROL

FUNCTIONAL CHARACTERISTICS

Display	TFT 2,4" IPS
Supply	Electric
Timer	-
Number of motors	2
Motor speeds	5
Max cooking temperature	260°C
Core probe	Available as optional
Cooking chamber material	AISI304
Opening door	Right handle
Chimney	50mm open
Humidification	Direct injection
Air injection	-
Self-washing	Standard



STANDARDS	
Certification	CE
TRAYS	
Trays rack	Wire PA-BIV 6/80 mm
Max tray load	4kg
DIMENSIONS	
Oven size with handle WxDxH	818 x 888 x 983 mm
Oven size without handle WxDxH	818 x 825 x 982 mm
Chamber size WxDxH	660 x 490 x 612 mm
Unit weight	98kg
PACKAGING	
Packaging	Pallet + carton box
Packaging size WxDxH	895 x 970 x 1120 mm
Unit weight with packaging	113kg
ELECTRICAL DATA	
HEATERS 5kW 50/60Hz	
Power	10,5kW
Frequency	50/60 Hz
Power supply	380-415V 3N~ / 220-240V 3~
Amperage	16,8A / 27,1A
Power cord req.	5G2,5 / 4G4
WATER CONNECTION REQUIREMENTS	
Humidification Water Inlet	3/4" M Gas threaded
Washing Water Inlet	-
Water drain	30mm
Max water hardness	5°f
Water pressure requirement min-max	150-200 kPa
CONSUMPTION	
Humidification Water	22,4l/h max consumption
Rinse Water @2barG	-
Short Washing Water @2barG	-
Long Washing Water @2barG	-
Short Washing Detergent *	-
Long Washing Detergent *	-



CONNECTIVITY

USB	USB 2.0
Bluetooth	-
Wi-Fi	Standard
Cloud	Standard

ACCESSORIES

Self clean system kit	S21
Oven stand	TA8274H17X - TA8274H30X TA8274H40X - TA8274H40S TA8274H49X - TA8274H49S TA8274H70X - TA8274H70S TA8274H80X - TA8274H80S
Stand wheel kit	R100
Hood (Air)	-
Hood (Water)	POCPMWF1 - POCPMWF2
External Core probe	CP5 (020SON0007)
Sous vide probe	-
Proofer	-
Stacking kit for 2 ovens	SKCP66
Smoker	SMK02
Blast Chiller	-
Blast chiller stacking kit	SK43
Water softner cover	WS10
Water softner 6800l	WS11
Water softner 12000l	WS12
Water pressure adapter	WPA
Water shower kit	S1
Detergent 6kg	DT2
Detergent 10kg	DT4



◆ | Standard ◇ | Optional - | Not available

TYPE OF COOKINGS	
Convection cooking	30°C - 260°C / 86°F - 500°F 30°C
Combi cooking	- 230°C / 86°F - 446°F 30°C -
Steaming cooking	130°C / 86°F - 266°F
Static cooking	-
Delta T cooking	5°C - 115°C Δ / 41 °F - 239 °F Δ
Core probe cooking	◇
Sous vide cooking	◇
Low temperature cooking	◆
DISPLAY AND CONNECTIVITY	
Type of display	2,4" LCD GRAPHIC
Multi-language display	◆
Unit set F° or C°	◆
Venix cloud	◆
Wi-fi	◆
Ethernet port	-
Web server	◆
Usb port	◆
SETTINGS	
Infinity time set	◆
Chimney set	OPEN
Fan speed set	5
Dehumidification set	-
Humidity set	0-100%
Preheat set	AUTOMATIC
RECIPE COOKING	
User recipes book	100
Factory recipes book	-
Cooking cycles	6
Recipes with name and picture	◆
Fast recipe selection buttons	-
SPECIAL CYCLE	
Multi-level mix ALL IN	-
Multi-level mix ALL OUT	-
Food regeneration	-
Overnight cooking	◆
Overnight self clean	◇



+9714 2 88 2777 ✉ admin@mariotkitchen.com

www.mariotstore.com







Cook & hold	-
Multi-timer	◆
Routine program	
Proofing	
Fast Cooling	◆
Automatic washing system / Rinse	◇
Fast start	-
Recipe scheduling	◆
Holding / Mass production	◆

TECHNICAL FEATURES

Cooking chamber material	AISI304
Second core probe	-
Insertion of the trays	HORIZONTALLY
Fast loading Pro	-
Glass door	DOUBLE
Easy clean internal glass	◆
High performance thermal insulation	YES
Break drop nebulizer	LED ON THE DOOR
Lightning	◆ NOT REVERSIBLE (RIGHT HANDLE)
Direct injection humidification	
Boiler humidification	
Opening door	
Reversing fan	
Heavy duty reversing fan	◆
Phase cut speed control	◆
Inverter speed control	-



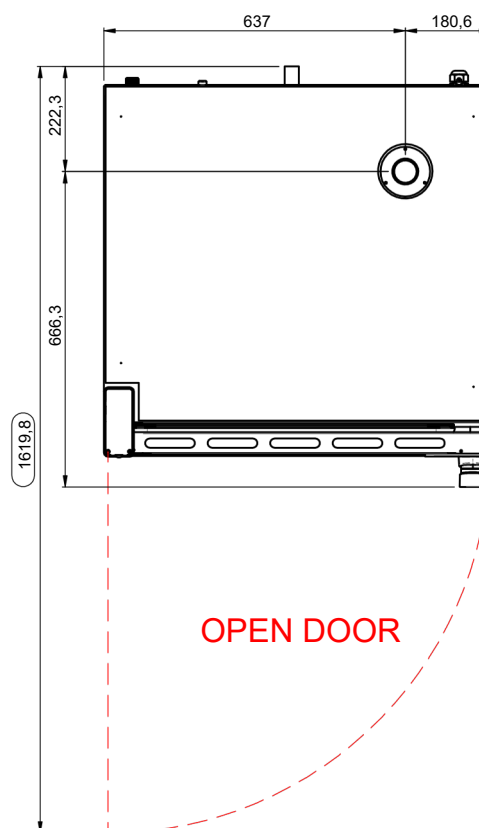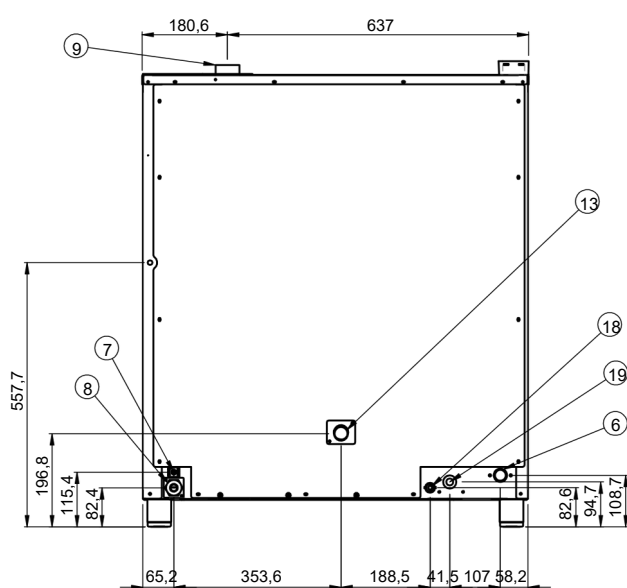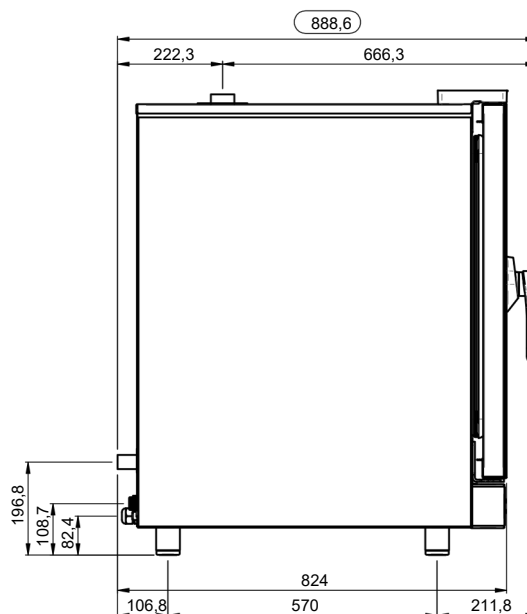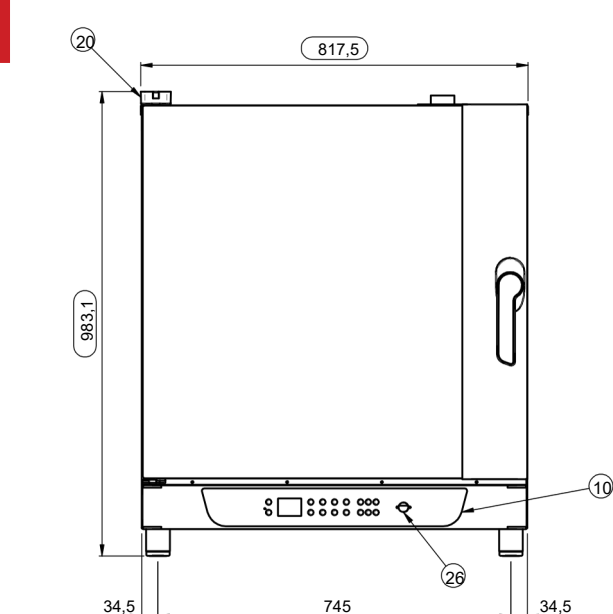

OPEN DOOR

02.	WATER IN-LET SOLENOID VALVE G3/4" (HUMIDIFICATION)
03.	UNIPOTENTIAL TERMINAL
04.	COMPRESSION CABLE GLAND
06.	HOT VAPOUR CHIMNEY Ø50MM (1,97")
07.	DIGITAL CONTROL

08.	DRAIN PIPE Ø30MM (1,18)
09.	WATER WASHING SYSTEM 3/4" BSP (GAS)
11.	DEGREASING DETERGENT WASHING SYSTEM
12.	USB CONNECTION
13.	CORE PROBE IN-LET



+9714 2 88 2777 admin@mariotkitchen.com

www.mariotstore.com

