



CA6008MH

PROOFER FOR CONVECTION OVEN
8 TRAYS 460 x 340 - 450 x 330
MECHANICAL CONTROL + HUMIDITY

FUNCTIONAL CHARACTERISTICS

Overlapping oven	B043* - B033* - T043* - T033* - V3043*
Display	Analogic
Supply	Electric
Timer	-
Max proofing temperature	60°C
Core probe	-
Cooking chamber material	AISI430
Opening door	Right handle

STANDARDS

Certification	CE
---------------	----

TRAYS

Trays rack	Sheet PA 8/75 mm (460x330 tray)
Max tray load	4kg



DIMENSIONS

Size with handle WxDxH	600 x 678 x 876 mm
Chamber size WxDxH	505 x 611 x 783 mm
Unit weight	28kg

PACKAGING

Packaging	Pallet + carton box
Packaging size WxDxH	650 x 730 x 992 mm
Unit weight with packaging	40kg
Crate packaging size (optional)	-

ELECTRICAL DATA

Power	1,2kW
Frequency	50/60Hz
Power supply	220-240V 1N~
Amperage	5,3A
Power cord req.	3G1,5

WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	Male 3/4" M Gas threaded
Water drain	-
Max water hardness	5°f
Water pressure requirement min-max	150-200 kPa





CONNECTIVITY

USB	-
Bluetooth	-
Wi-Fi	-
Cloud	-

ACCESSORIES

Water softner cover	WS10
Water softner 6800l	WS11
Water softner 12000l	WS12
Water pressure adapter	WPA



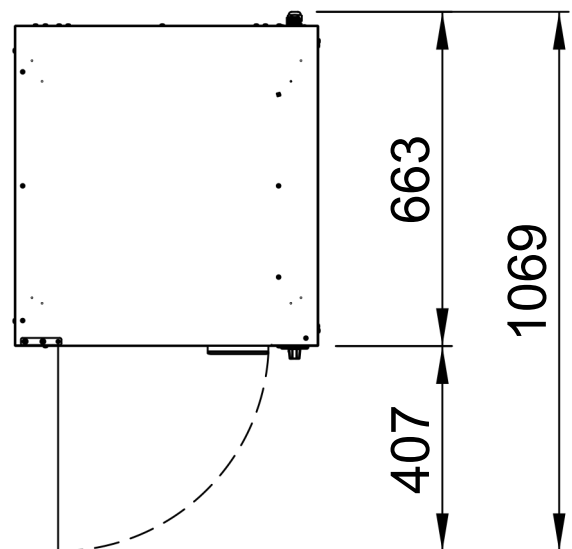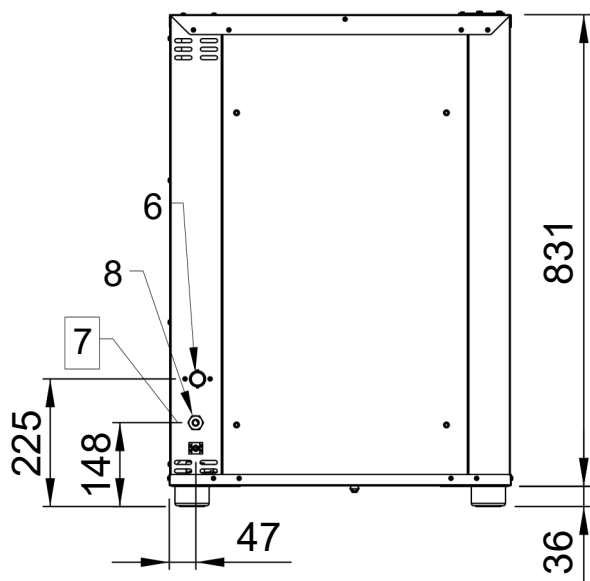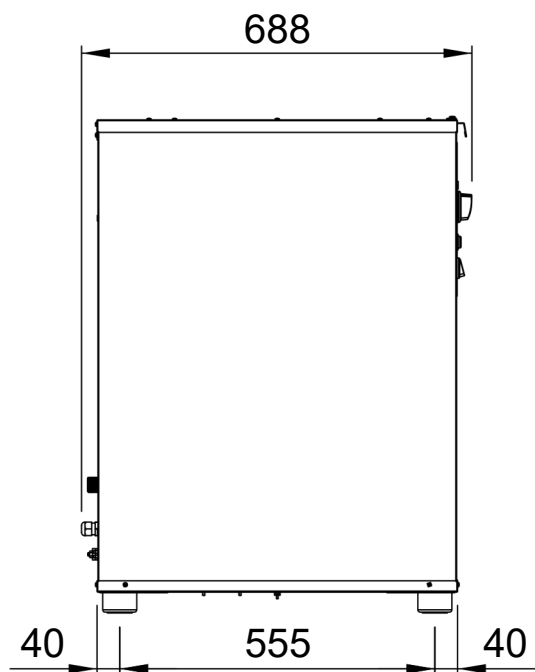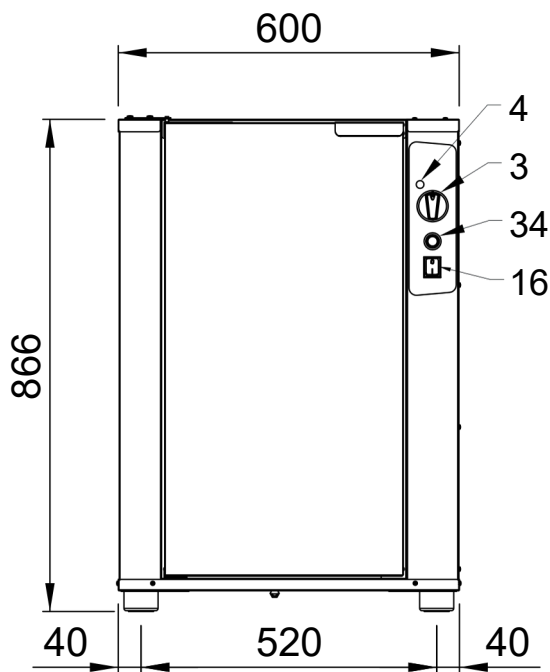

03.	TEMPERATURE SELECTOR
04.	LIGHT ON/OFF HEATING ELEMENT
06.	HUMIDIFICATION SOLENOID VALVE 3/4" BSP (GAS)

07.	UNIPOTENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
16.	ON/OFF
34.	WATER INJECTION REGULATION



+9714 2 88 2777 admin@mariotkitchen.com

www.mariotstore.com

