


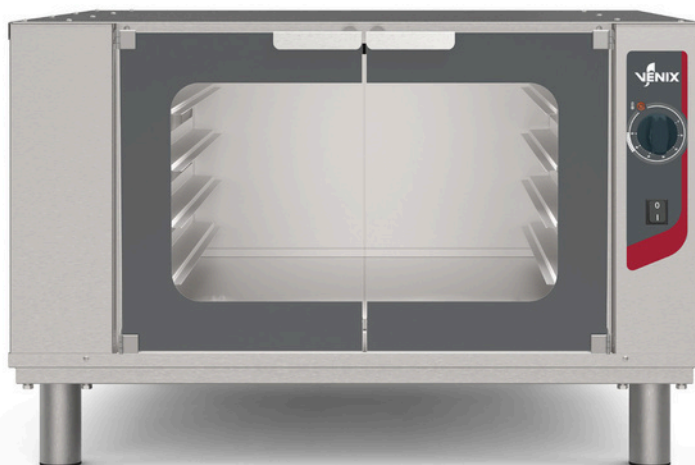

CA9308DKM0

PROOFER FOR SQUERO DECK
8 TRAYS 600 x 400 - GN 1/1
MECHANICAL CONTROL

FUNCTIONAL CHARACTERISTICS

Overlapping oven	SQDK01* - SQDK02*
Display	Analogic
Supply	Electric
Timer	-
Max proofing temperature	60°C
Core probe	-
Cooking chamber material	AISI430
Opening door	Double door

STANDARDS

Certification	CE
---------------	----

TRAYS

Trays rack	Sheet PA-BIV 4/80 mm
Max tray load	4kg



DIMENSIONS

Size with handle WxDxH	935 x 925 x 620 mm
Chamber size WxDxH	608 x 975 x 385 mm
Unit weight	53kg

PACKAGING

Packaging	Pallet + carton box
Packaging size WxDxH	985 x 1005 x 645 mm
Unit weight with packaging	64,5kg
Crate packaging size (optional)	-

ELECTRICAL DATA

HEATERS 1,3kW (240V)		
Power	2,4kW	
Frequency	50/60Hz	220-
Power supply	240V	1N~
Amperage	10,4A	
Power cord req.	3G1,5	

WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	-
Water drain	-
Max water hardness	-
Water pressure requirement min-max	-





CONNECTIVITY

USB	-
Bluetooth	-
Wi-Fi	-
Cloud	-

ACCESSORIES

Water softner cover	WS10
Water softner 6800l	WS11
Water softner 12000l	WS12
Water pressure adapter	WPA



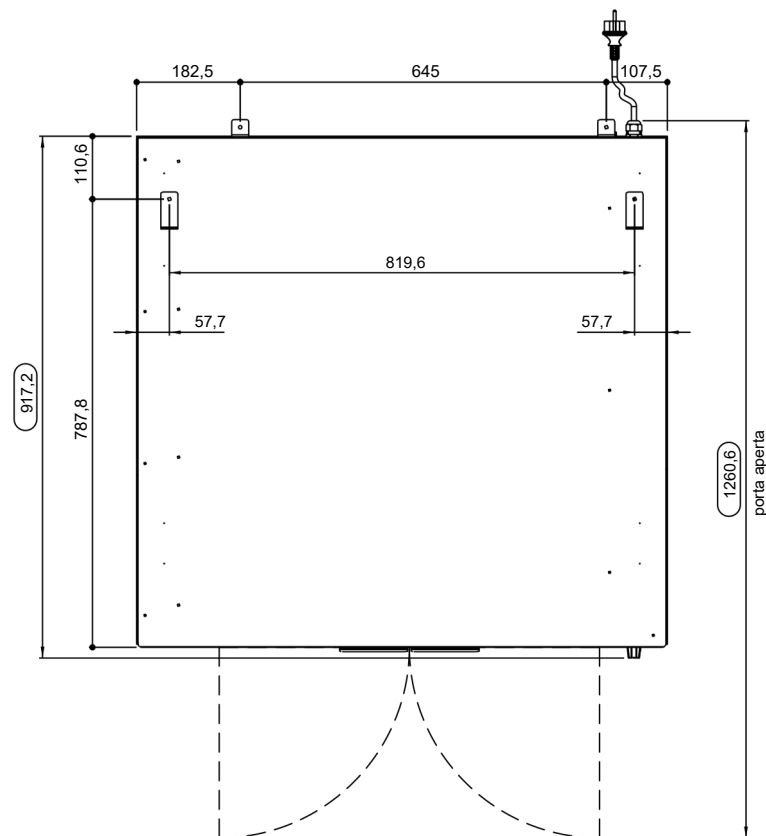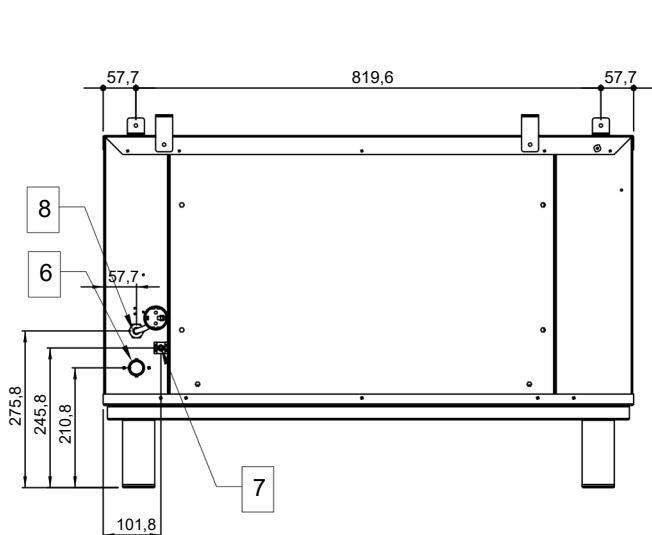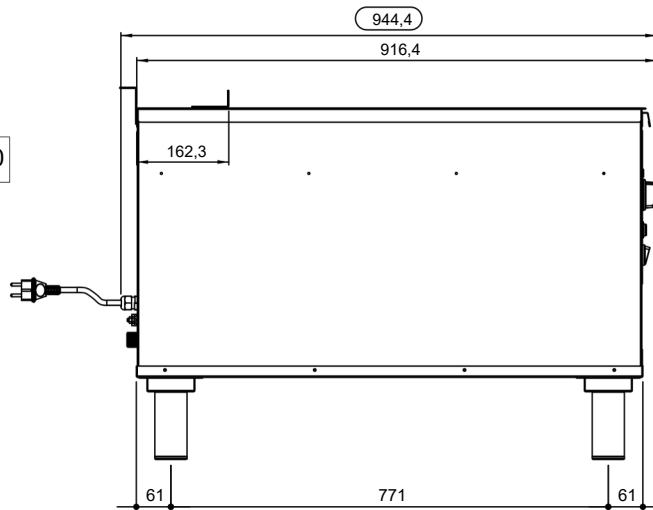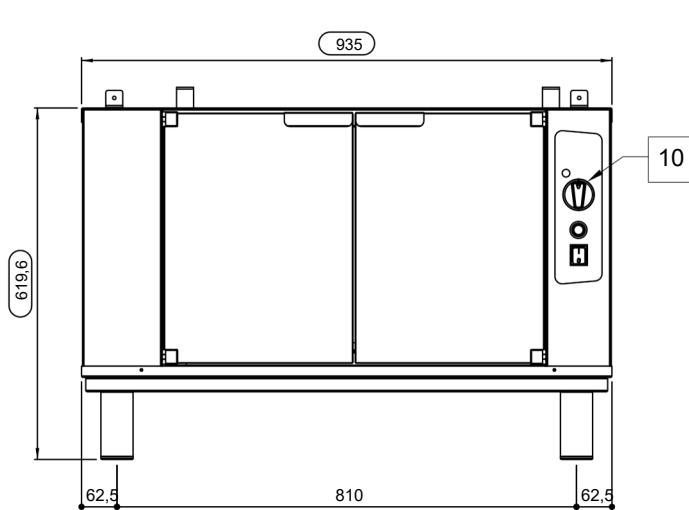

06.	HUMIDIFY SOLENOID VALVE 3/4" BSP (GAS)
07.	UNIPOTENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
10.	DIGITAL CONTROL



+9714 2 88 2777 admin@mariotkitchen.com

www.mariotstore.com

