



CA9308M0

PROOFER FOR SQUERO OVENS
8 TRAYS 600 x 400 - GN 1/1
MECHANICAL CONTROL

FUNCTIONAL CHARACTERISTICS

Overlapping oven	SQ04* - SQ05* - SQ06* - SQ07* - SQ10* - SQ12* SQ04A* - SQ05A* - SQ06A* - SQ07A* - SQ10A* - SQ12A*
Display	Analogic
Supply	Electric
Timer	-
Max proofing temperature	60°C
Core probe	-
Cooking chamber material	AISI430
Opening door	Double door
STANDARDS	
Certification	CE



TRAYS

Trays rack	Sheet PA-BIV 8/75 mm
Max tray load	4kg

DIMENSIONS

Size with handle WxDxH	935 x 803 x 867 mm
Chamber size WxDxH	817 x 736 x 782 mm
Unit weight	48kg

PACKAGING

Packaging	Pallet + carton box
Packaging size WxDxH	975 x 840 x 993 mm
Unit weight with packaging	63kg
Crate packaging size (optional)	-

ELECTRICAL DATA

Power	2,4kW
Frequency	50/60Hz 220-
Power supply	240V 1N~
Amperage	10,5A
Power cord req.	3G1,5

WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	-
Water drain	-
Max water hardness	-
Water pressure requirement min-max	-





CONNECTIVITY

USB	-
Bluetooth	-
Wi-Fi	-
Cloud	-

ACCESSORIES

Water softner cover	WS10
Water softner 6800l	WS11
Water softner 12000l	WS12
Water pressure adapter	WPA



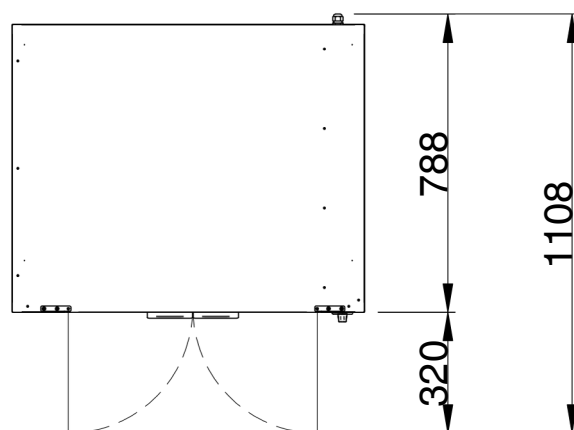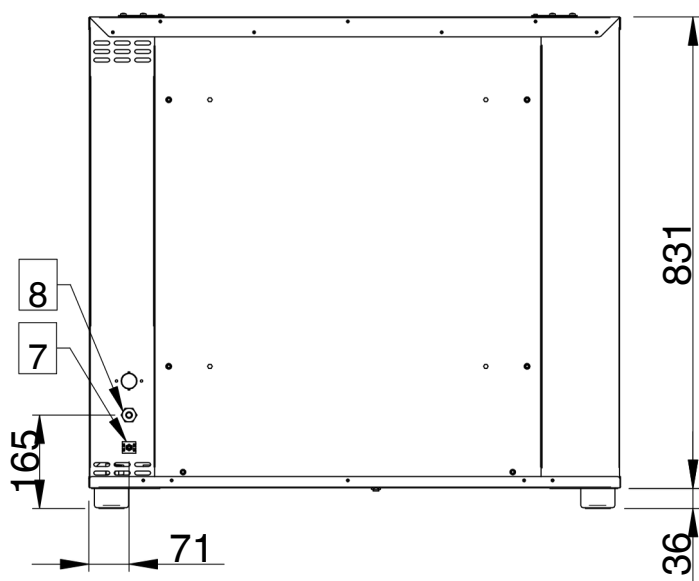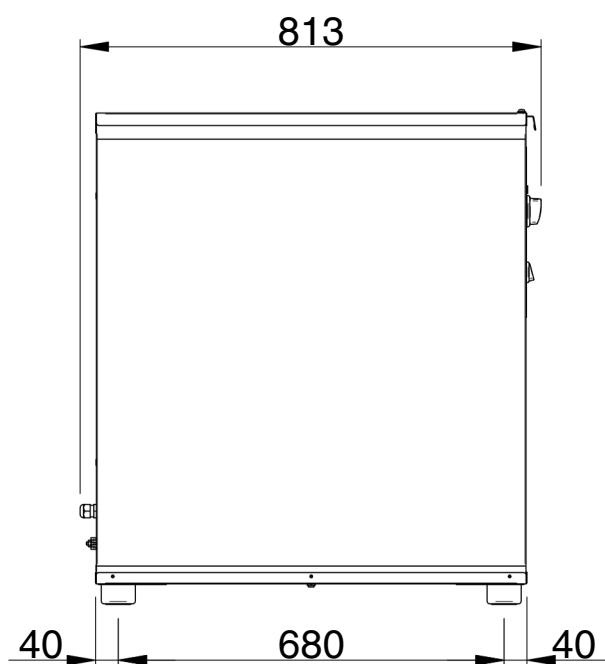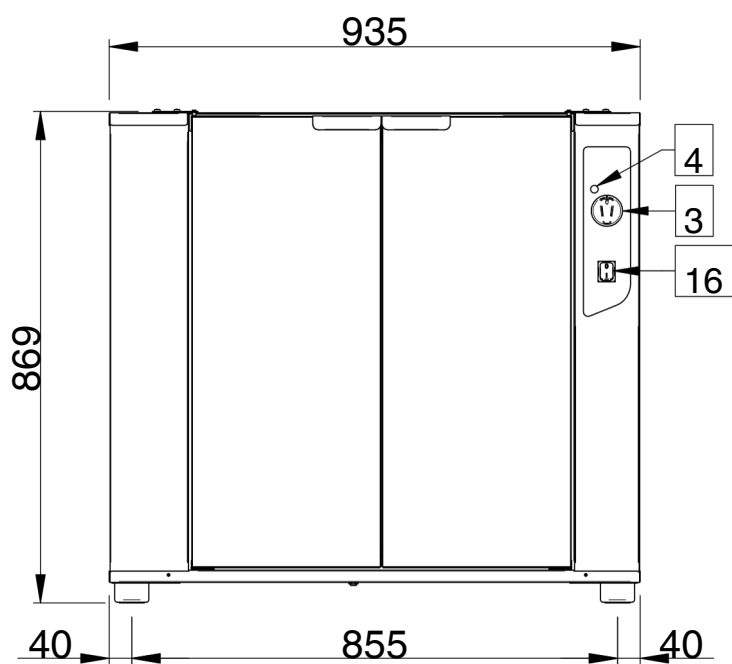

03.	TEMPERATURE SELECTOR
04.	LIGHT ON/OFF HEATING ELEMENT
07.	UNIPOTENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
16.	ON/OFF



+9714 2 88 2777 admin@mariotkitchen.com

www.mariotstore.com

