MF 37 AS

ModularIceMachine 215 kg



FEATURES

- Produces Flake Ice, extruded at a temperature just below 0°C, with25% residual water content, hence very rich in moisture.
- Resistant stainless steel exterior.
- AISI304 Stainless steel evaporator and ice scraper blade.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Electronic control board with self diagnostic and malfunction alarms.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



CONDENSING SYSTEM

Water cooled
Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

RECOMMENDED BIN

BIN	KG
SB193	129

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Modelsand specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 215 kg

MF 37 AS

ModularIceMachine 215 kg

Modular Ice Machine 215 kg

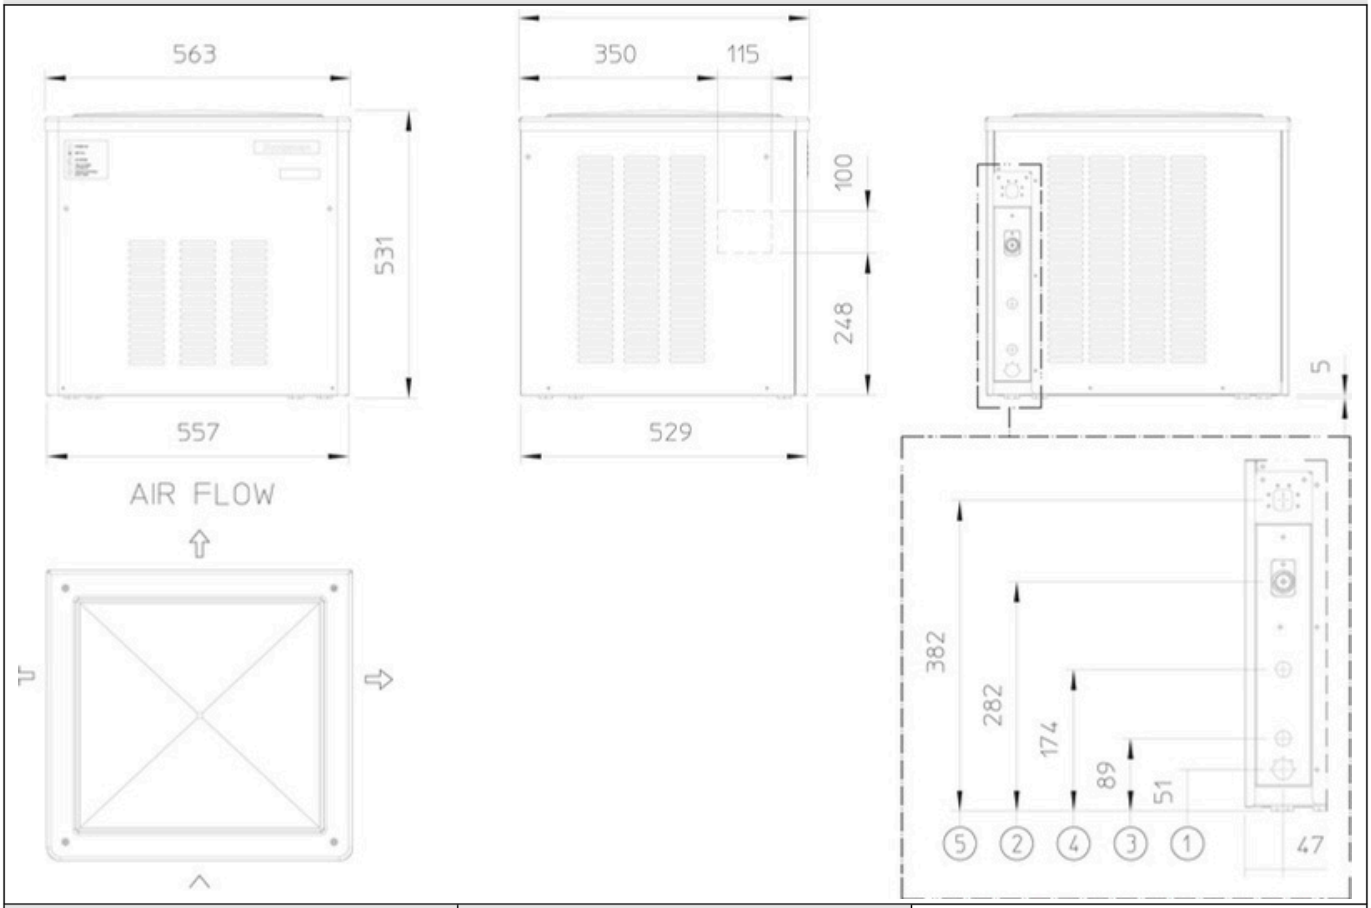

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions
Size (WxDx H)	560 x 533 x 525 mm	Size (W x D x H)	680 x 610 x 630 mm	
Net weight	52 kg	Gross weight	55kg	

			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
MF 37 WS OX	230\50\1	W	215	210	185	1,5	14	59	580	3 x 1,5	10
MF 37 AS OX	230\50\1	A	200	199	170	1,5	15	7	695	3 x 1,5	10