AF 107 AS

Self Contained Ice Machine 130 kg



FEATURES

- Produces granular shape ice flakes, 75% hardness.
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues.
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish.
- Ergonomically convenient, slanted & disappearing storage bin door.
- Front access for easier maintenance.
- Front-in, front-out airflow allows for built-in installations.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 107
Flake ice
Residual water content 25%

CONDENSING SYSTEM
Air cooled

REFRIGERANT GAS
R290

VOLTAGE V/Hz/ph
230/50/1

INTERNAL BIN CAPACITY
30 kg

CERTIFICATIONS

CE WRAS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 130 kg


AF 107 AS


Self Contained Ice Machine 130 kg


Self Contained Ice Machine 130 kg

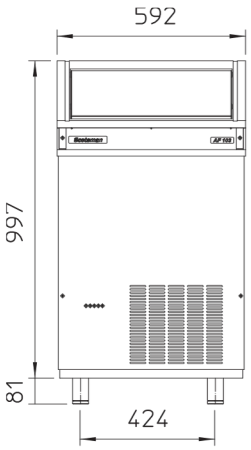

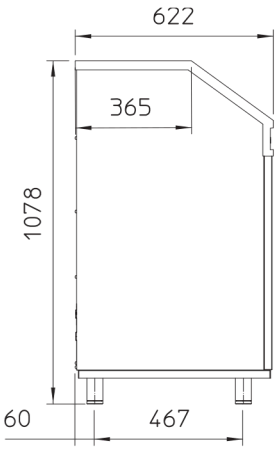

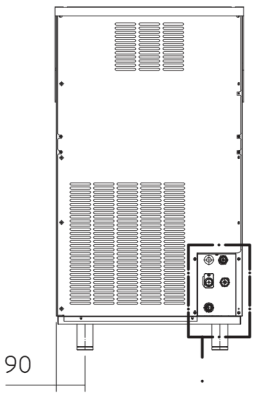

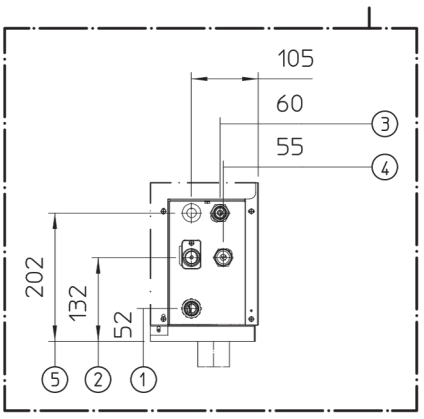



UNIT OF MEASUREMENT: **mm**

1. 13/16" OD - OVERFLOW DRAIN

2. 3/4" GAS - WATER INLET

3. 3/4" GAS - WATER OUTLET

WATER COOLED UNIT ONLY

4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY

5. CORD SET

UNIT DATA		**SHIPPING DATA**	
Size (W x D x H)	592 x 622 x 1078 mm	Carton (W x D x H)	670 x 690 x 1180 mm
Net weight	66 kg	Weight	74 kg

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	**Voltage**	**10°C/10°C**	**21°C/10°C**	**32°C/21°C**	**kWh/ 100 kg**	**kWh/ 24h**	**l/h**	**W**	**W**	**No. x Ømm²**	**A**
		kg	kg	kg							
AF 107 AS	230/50/1	130	126	102	8.4	9	4.5	400	1000	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions