AF 127 AS

Icemaker with built -inbin, up to 131 kg



CH ARACTERIS TICS

• It produces granular ice flakes with a hardness of 75%.
• Ice scoop holder securely positioned in the ice bin.
• Computerized Advanced Diagnostic Testing.
• Inlet and outlet airflow on the front panel (air-cooled model only) for built-in installation.
• Front-access condenser air filter, removable and washable (air-cooled version only).
• Easy access to the front panel of the machine's technical/service area.
• XSafe: All-natural, machine-integrated sanitizing system. It acts automatically and continuously keeping the machine clean and sanitized.



AF Flake
FLAKE
-

Model	Cubetto Ø	H	Weight
AF Flake			

CONDENSATION SYSTEM
Air
Water

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

BIN CAPACITY

KG
40

CERTIFICATIONS

OPERATIONAL REQUIREMENTS


	Minimum	Maxi mu m
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE
Models and specifications are subject to change without notice. This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

AF 127 AS

Icemaker with built-in bin, up to 131 kg

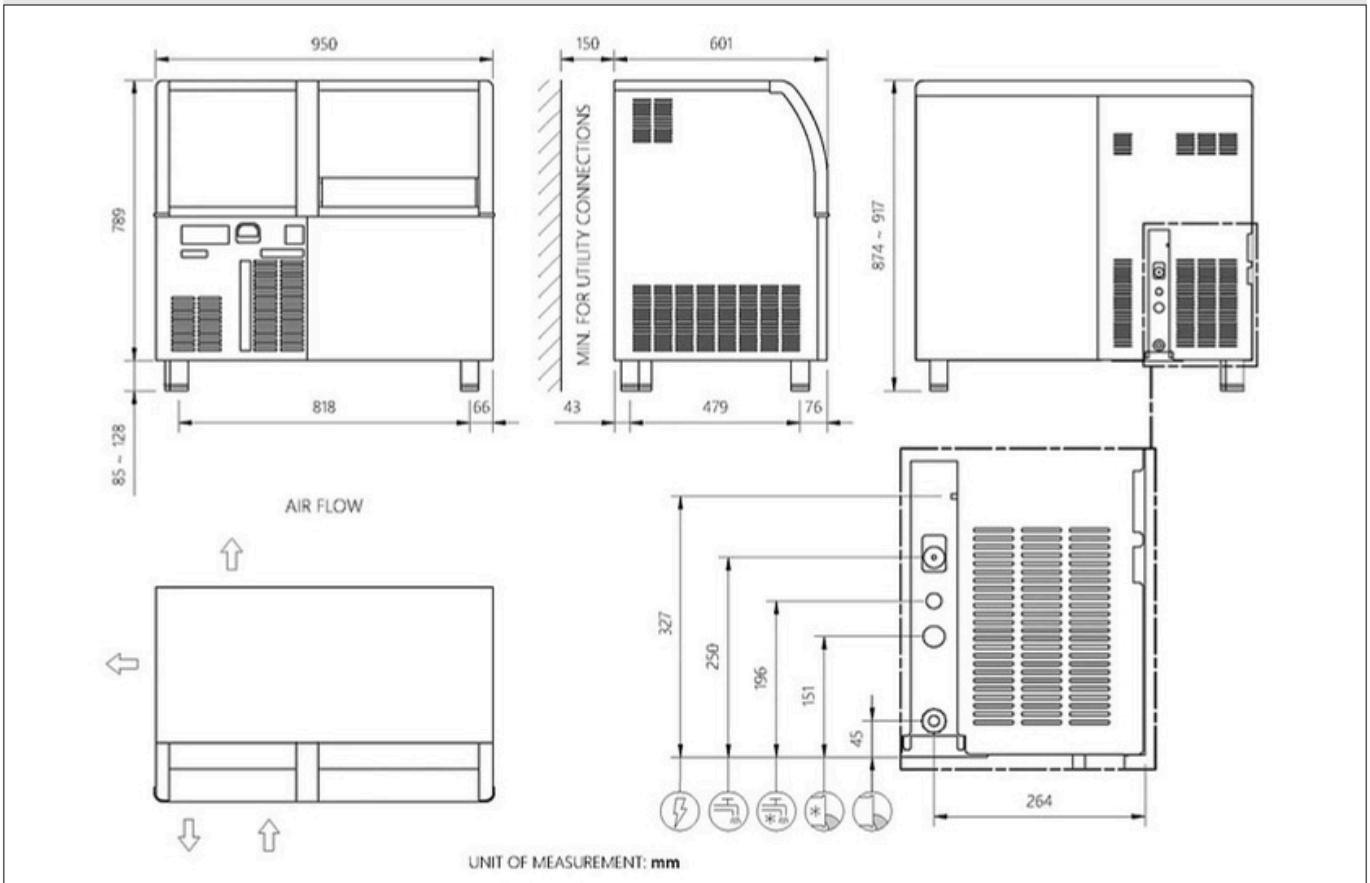

MACHINE DATA	SHIPPING DATA	
Dimensions (LxWxH): 950 x 605 x 872 mm Net weight 67 kg	Dimensions (LxWxH): 103 x 68 x 96 cm Net weight 89 kg	(*) The data refers to the following temperature conditions: 32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consum pti on Water (*)	Instant power	Ca bl es	Fuse
Versi on	Vol ta ge	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kW h/24h	l/h	W	No. x Ømm²	A
AF 127 AS	230\50\1	A	131	123	108	0,80	9,0	4,0	405	1,50	10
AF 127 WS	230\50\1	W	131	125	108	0,90	9,0	35,0	390	1,50	10
AF 127 AS	220-240\60\1	A	140	138	115	0,80	11,0	5,0	490	1,50	10