AF 157 AS

SelfContainedIce Machine 190 kg



FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



CONDENSING SYSTEM

air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Modelsand specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.


Self Contained Ice Machine 190 kg

AF 157 AS

SelfContainedIce Machine 190 kg

MARIOT KITCHEN EQUIPMENT

Self Contained Ice Machine 190 kg

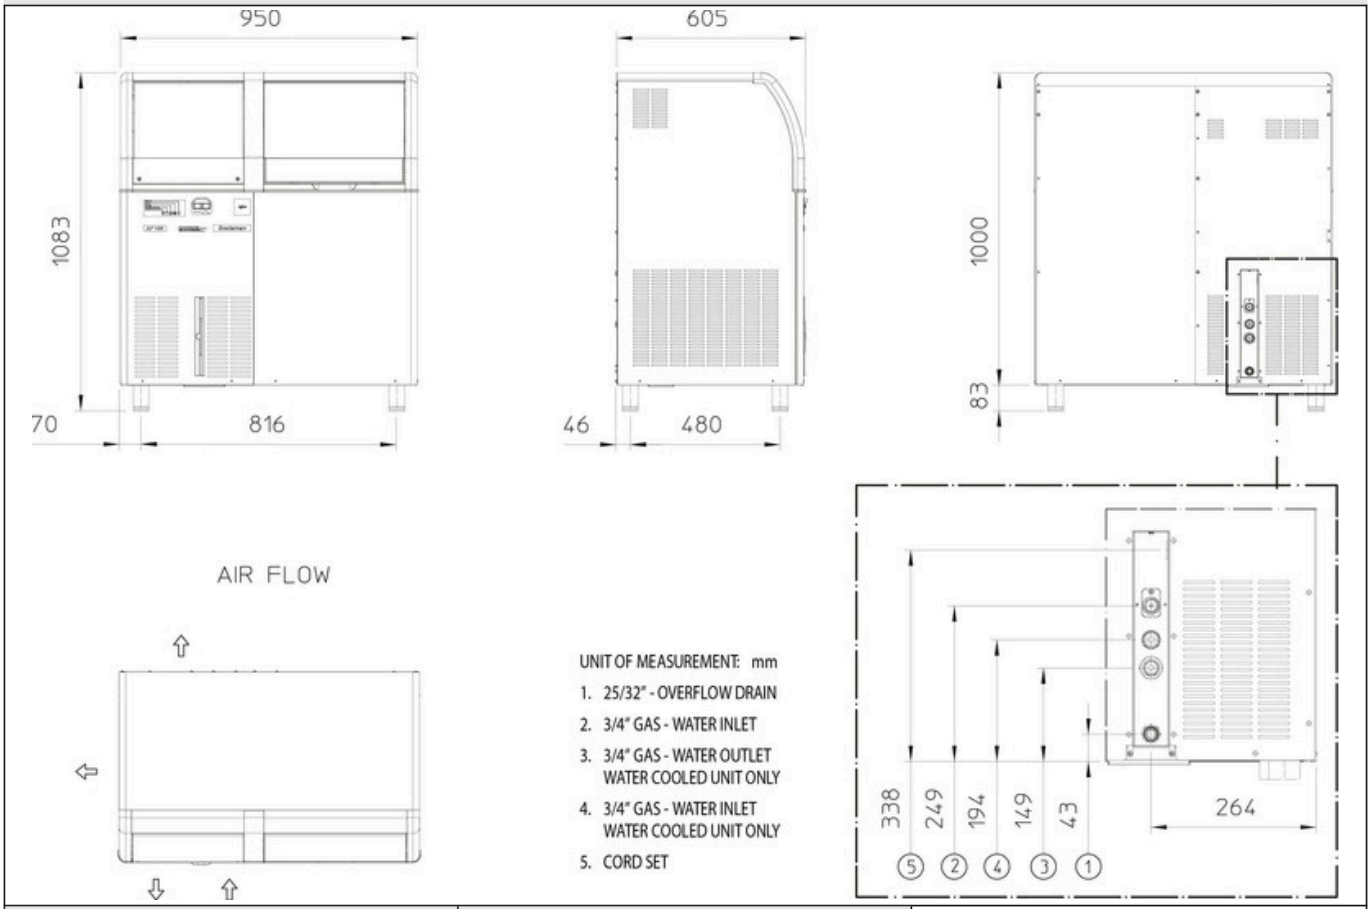

UNIT DATA		**SHIPPING DATA**		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions
Size (WxDx H)	950 x 605 x 1.000 mm	Size (W x D x H)	1030 x 680 x 117 mm	
Net weight	76 kg	Gross weight	89kg	

			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
AF 157 AS OX	230\50\1	A	190	169	137	60	1,1	13	6	550	3 x 1,5	10