AF 87 AS

SelfContained Ice Machine 70 kg



FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

CERTIFICATIONS

CE EAC

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE
Modelsand specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 70 kg

AF 87 AS

SelfContained Ice Machine 70 kg

Self Contained Ice Machine 70 kg

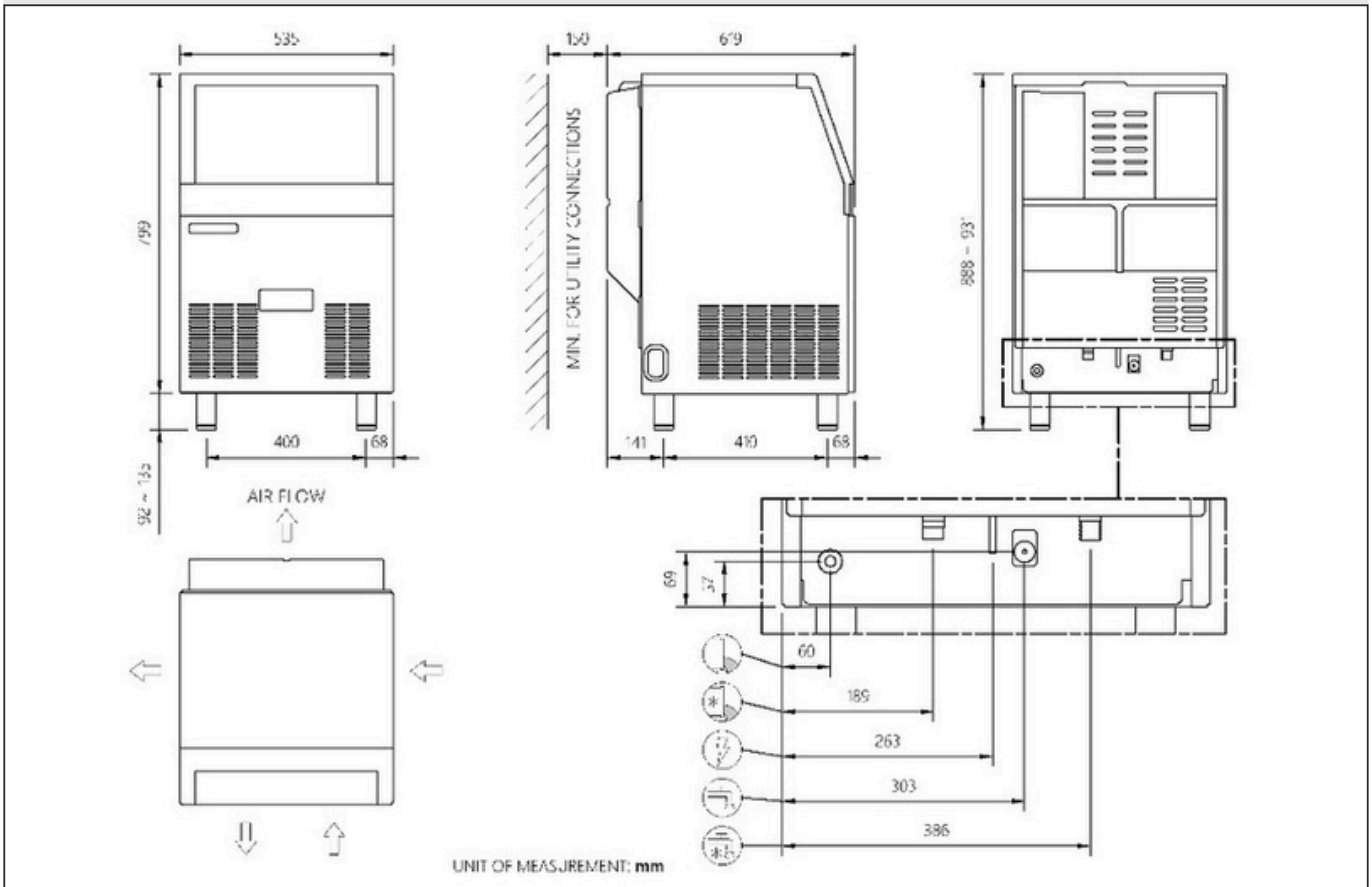

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions
Size (WxDx H)	535 x 626 x 800 mm	Size(WxDxH)	600 x 690 x 980 mm	
Net weight	50 kg	Gross weight	58kg	

			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
AF 87 AS OX	230\50\1	A	70	68	56	25	0,4	6	2	275	3 x 1,5	10